

Work Zone / Gap Stop Professional Gun Foam Sealant

TECHNICAL DATA SHEET

1. PRODUCT NAME

Work Zone / Gap Stop Professional
Gun Foam

2. MANUFACTURER

ICB Products,
75 Chambers Drive, Unit 9,
Ajax, Ontario, L1Z 1E1.
Phone: (905) 619-0115
FAX: (905) 619-6583

3. PRODUCT DESCRIPTION

Work Zone / Gap Stop Professional Gun Foam is a low expanding foam designed for use with professional foam applicator guns such as the G7, G7LD, & most other foam guns. By using Professional Gun Foam, contractors and industrial users can save money on labour & materials, and get the job done easier, and with less potential for mess. When used with a gun applicator, Work Zone / Gap Stop Professional Gun Foam

will save on labour, as it is much faster than with conventional aerosol cans. It provides easy one hand operation, no mess or clean up, and the foam is always ready to use. It will also save on materials due to its low expansion nature, and will reduce accidental overfilling of cavities, resulting in less excess material having to be trimmed off and wasted. Foam left unused in a gun applicator system will not harden, which means no more throwing away half used cans. It is an aerosol driven one component, moisture curing polyurethane material, which cures to a closed cell, semi-rigid foam with high cellularity for excellent insulation against heating and cooling loss, and exhibits enough elongation and flexibility to ensure an excellent and permanent seal. Its adhesive properties are excellent to ensure that it will stay in place, and not release from the surfaces to be sealed. The cured foam blocks out drafts, dirt, water, and is insoluble, rot proof, vermin resistant, non-toxic, and will not absorb water.

Basic Use: Recommended for use by professional users on any foam application. May be used around window and door frames, however for best results around windows & doors, Work Zone / Gap Stop Window & Door Foam is recommended.

Composition and Materials: Work Zone / Gap Stop Professional Gun Foam is made of polyurethane prepolymers, and aerosol propellants. It also contains fire retardant to reduce the rate of burning.


Colour: tan. May be painted.

Sizes: 680 gram, and 820 gram cans.

Grade: Professional grade.

Limitations: Cured foam must not be permanently exposed to ultraviolet

light, as it would start to deteriorate in 2-3 days. If the foam is going to be exposed, it should be painted or covered for protection against ultraviolet radiation deterioration. Cured foam should not be exposed to temperatures above 115°C (240°F). Excessive temperature will cause deterioration of the foam. Aerosol propellants are affected by cold temperatures, and will reduce in pressure as the temperature falls, which may result in insufficient pressure to fully empty the can. To ensure that aerosol pressure is sufficient to empty the can, keep the can warm until ready for use. All polyurethane foams require available moisture from the air for curing, and will change in physical characteristics and curing time in colder temperatures where there may be little or no moisture in the air. Do not apply in totally confined spaces, as the sealant requires atmospheric moisture to cure. For best results, apply at temperatures between 15°C (60°F) and 40°C (100°F). As with all types and brands of polyurethane foam sealants (with the exception of Work Zone / Gap Stop All Seasons Gun Foam), application below 5°C (40°F) is not recommended. To promote proper curing of foam during colder or very dry periods, moisten surfaces with water before application. Before product application, user should determine suitability of Work Zone / Gap Stop Professional Gun Foam for intended use.

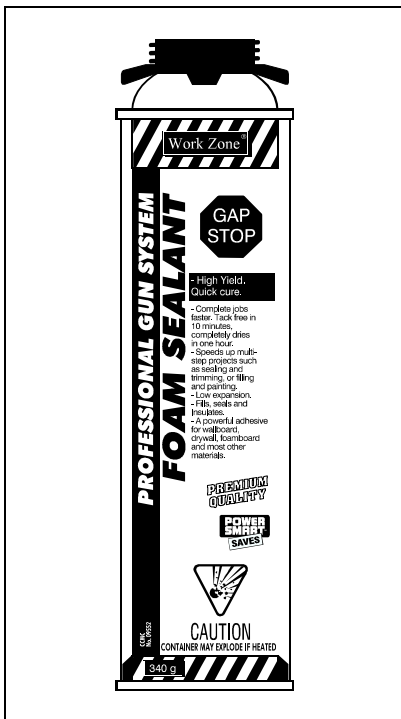

4. TECHNICAL DATA

Listed data are based on laboratory results and may differ in practical application. All values will vary with humidity, temperature, and foam thickness.

Yield -cured foam in 6mm(1/4")bead
680 gr. - up to 1067 metres (3500')
820 gr. - up to 1287 metres (4220')
Expansion Rate (increase in volume due to expansion) - 25%
Density - 1.75 +/-0.25 Lb./ft³
Cure time @20°C and 40% R.H.
Tack Free - less than 10 minutes
Ready to cut - less than 1 hour
Thermal Resistance - R4.5-5.5 / in.
Cellularity - 80% closed cell
Water Absorption - 0.4% Vol.
UL Classified:ASTM-84
Flame spread - 10
Smoke Density - 15
Odour - slight
Freeze-thaw stability - stable
Shelf life - 2+ years.
Storage temperature - +5°C to 37°C (40°F to 100°F)

5. INSTALLATION

General Preparation: Wear work clothes, gloves, and eye protection. Cover adjacent finished surfaces, finished floors, and carpets. Shake can vigorously before use.

Surface Preparation: Surface should be free of contaminants, dirt, standing water, oil, or solvents. Moistening dry surfaces is recommended for optimum performance.

Filling Area: Hold gun so that can is above gun during application. Use sparingly, foam will expand. Fill cavities 75% to allow for expansion. Fill very large areas or apertures in layers rather than one application, and work from bottom to top.

Post Application: Cured foam may be cut, sanded, painted, or coated with plaster or fillers. Exposed foam should be painted or covered to protect from UV light.

Cleanup: Uncured foam may be removed with acetone, paint thinner, or nail polish remover. Dried foam is very difficult to remove, and can only be removed mechanically. Refer to instructions which accompany foam applicator for cleaning of guns.

Failure to clean and maintain foam applicator guns will result in blockage of the gun, and may necessitate replacement.

6. PRODUCT SAFETY

CAUTION:

Contains MDI Monomer, Polyurethane Resin, and HCFC propellant. DRIED FOAM EXPOSED TO TEMPERATURES IN EXCESS OF 115°C (240°F) MAY RELEASE HAZARDOUS DECOMPOSITION PRODUCTS. Ventilate work area with moving air. Overexposure to vapours may cause dizziness or headache - move to fresh air. Do not puncture, expose to heat or store at temperatures above 49°C (120°F). Wear protective gloves, clothes, and eye protection. Use drop cloths. In case of eye contact, flush eye with water for 15 minutes and get immediate medical attention. If ingested, call a physician. REMOVE WET FOAM IMMEDIATELY FROM SKIN AND CLOTHES WITH ACETONE, PAINT THINNER, OR NAIL POLISH REMOVER. DRIED FOAM IS HARD TO REMOVE FROM SKIN AND CLOTHES. If foam dries on skin, apply generous amounts of petroleum jelly or lanolin, leave on for one hour, wash thoroughly, and repeat process until foam is removed. Do not attempt to remove dried foam with solvents. KEEP OUT OF REACH OF CHILDREN.

7. AVAILABILITY AND COST

Marketed throughout Canada and some foreign countries. Work Zone / Gap Stop Professional Gun Foam is sold through building supply, hardware, paint, and specialty distributors. Costs are available from local Work Zone distributors and representatives, or from company corporate offices.

8. WARRANTY

ICB Products warrants that Work Zone / Gap Stop Professional Gun Foam is manufactured according to our published standards, and that it is free from defects. ICB Products will provide replacement for, or refund

the purchase price of, that portion of material which proves defective. This constitutes the limit of ICB Products' liability and obligation. The company will not be liable for any injury, loss or damage, direct or consequential, arising out of the use of or the inability to use the product. Before using, user must determine suitability of the product for intended use, and user assumes all risk and liability whatsoever in connection therewith.

9. MAINTENANCE

No maintenance is required for properly applied, cured product.

10. TECHNICAL SERVICES

Technical assistance is available from ICB Products corporate offices only. Information and testing results are guidelines only and not intended for preparing specifications.

11. FILING SYSTEMS

- Technical Data Sheet
- Product catalogues, brochures.
- Additional product information is available upon request

12. COPYRIGHT

The information recorded on this technical data sheet is protected by copyright. Duplication in whole or in part is prohibited unless consent is expressly given by ICB Products.

© 2000, ICB Products.
All rights reserved.